


## Robinet cu sertar cauciucat cu capete filetate

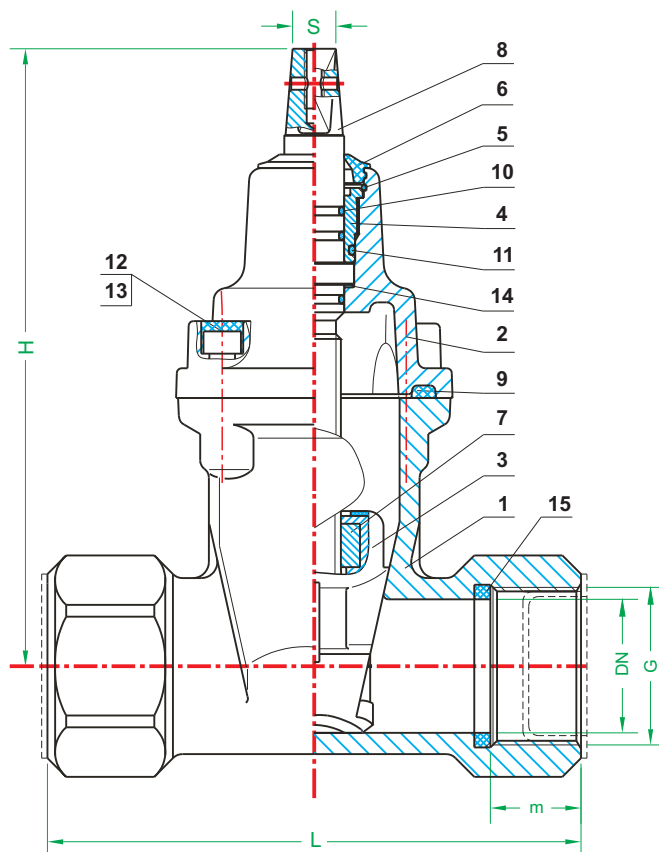

### SPECIFICATII PRINCIPALE

PRESIUNE NOMINALA	1.6 MPa
TEMPERATURA APLICABILA	120 C
MATERIAL PRINCIPAL	EPDM

### DIMENSIUNI CONSTRUCTIVE

DN	G/R [Toi]	L [mm]	m [mm]	H [mm]	S	Masa [kg]	
						2116	2126
25	1" / 1"	105	20	145	12	2.3	2.1
32	5/4" / 5/4"	120	20	145	12	2.4	2.2
32	5/4" / 2"	120	20	145	12	-	2.3
40	6/4" / 6/4"	180	38	14	14	6.5	6.3
40	6/4" / 2"	180	38	14	14	-	6.4
50	2" / 2"	200	40	14	14	7.4	7.2

### DENUMIRE PIESE + MATERIAL

1. Corp	fonta cenusie, fonta ductila
2. Capac	fonta cenusie, fonta ductila
3. Sertar	Fonta cenusie, fonta ductila
4. Bucsa etansare tija	Aliaj Cupru
5. Inel opritor	Otel 65G
6. Garnitura antipraf	Cauciuc EPDM
7. Piulita tija	Aliaj cupru
8. Tija	Otel inoxidabil X20Cr13
9. Garnitura corp-capac	Cauciuc EPDM
10. Inel etansare "o-ring"	Cauciuc EPDM
11. Organe asamblare	Otel Fe/Zn5, otel zincat
12. Protectie organe	Parafina
13. Saiba	Polietilena
14. Garnitura teava	Cauciuc EPDM